


UVION AIR ASEPTICIZER

High Level Hygienic Particle Reduction and Air Conditioning Device

Technical Specifications / Datasheet

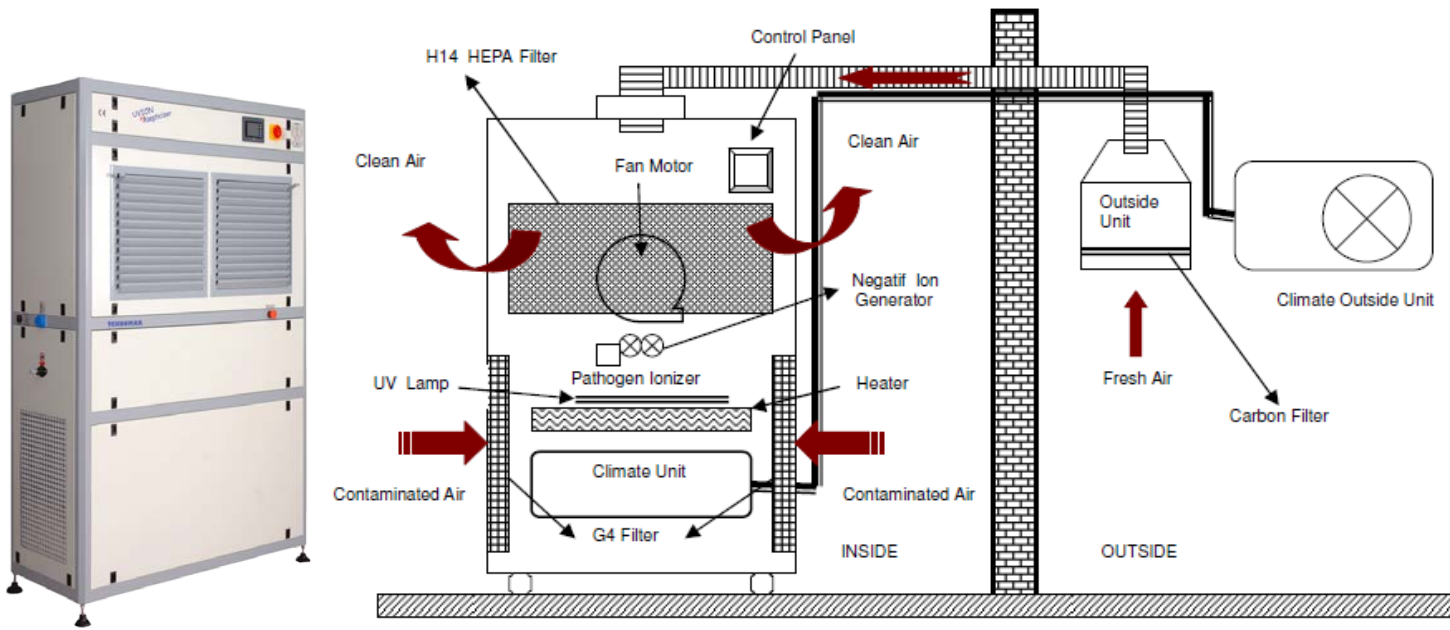

Aseptimizer Installation Diagram

AVAILABLE AREAS

Where high hygiene and air-conditioning is needed, such as; Operating Rooms, Isolation Rooms, Intensive Care Units (Newborn, Child, Adult), Patient Rooms, Burn Treatment Rooms, Emergency Units, Triage Units, Dialysis Units, Blood Bank Units, Decontamination Rooms-Areas, Contamination (Tuberculosis Etc.) Laboratories, Nanotechnology Laboratories, Production Facilities (Food, Medicine, Medical Equipment), Clean Rooms, Etc. It is produced as an alternative to the central system in all positive and negative pressure environments where high hygiene is required.

Construction is not required due to its compact structure.

MODELS	CW1350	CW1000	CW1000 CONTAINER	CW650	ISOLATED ROOM CW650 IO
TYPE	Compact Type-High Level Hygienic Particle Reduction and Air Conditioning Device				
CLASS	MODUL A- CLASS I				
PHYSICAL AND TECHNICAL SPECIFICATIONS					
EXTERIOR DIMENSIONS (W-D-H) (mm)	1390 x 560 x 2250	1085 x 560 x 2250	800 x 1390 x 1200	780 x 560 x 2250	780 x 560 x 2250
PACKAGE SIZES (cm)	152 x 70 x 235	122 x 70 x 235	90 x 150 x 135	92 x 70 x 235	92 x 70 x 235
OUTDOOR UNIT PACKAGE MEASUREMENTS (cm)	70 x 115 x 100	70 x 115 x 100		70 x 115 x 100	70 x 115 x 100
EQUIPMENT WEIGHT (kg)	217	190	200	147	147
WORKING MODE	NEGATIVE/POSITIVE	NEGATIVE/ POSITIVE	NEGATIVE/ POSITIVE	POSITIVE	NEGATIVE
PROGRAMS	3 Positive, 1 Negative Total 5 Programs	3 Positive, 1 Negative Total 5 Programs	3 Positive,, 1 Negative, 1 Auto Total 5 Programs	3 Positive, 1 Auto Total 4 Programs	3 Negative, 1 Auto Total 4 Programs
HEATING AND COOLING CAPACITY (Btu)	24000	24000	24000	10000	10000
EXTERNAL HEATING CAPACITY (kW)	2.2	2.2	2.20	1.3	1.3
AIR CONDITIONING POWER CONSUMPTION (Kw)	5.2	5.2	5.2	2.7	2.7
FILTRATION POWER CONSUMPTION (Kw)	0.5	0.5	0.5	0.5	0.5
H14 MAIN FILTER SIZE (mm)	1220 x 610 x 78	915 x 610 x 78	915 x 610 x 78	610 x 610 x 78	610 x 610 x 78
DIFFUSER SIZE (W-H) (cm)	54 x 54 2 UNITS	54 x 54 2 UNITS	54 x 54 2 UNITS	54 x 54 1UNIT	54 x 54 1 UNIT
FRESH AIR INTRODUCTION CAPACITY (m ³ / h)	700	600	600	400	(-) 600
INTERNAL AIR CAPACITY	1900	1500	1500	1100	1000
TOTAL AIR CHANGE CAPACITY (m ³ / h)	2500	2000	2000	1200	1200
ACTIVITY AREA At CLASS 10,000 (m ³)	130	110	110	80	80
ACTIVITY AREA At CLASS 100.000 (m ³)	170	150	150	110	110

TEKNOMAR MAKİNA İMALAT İTH. İHR. SAN. VE TİC. LTD. ŞTİ. Tel: +90 312 385 0040 Fax: +90 312 385 6784 info@teknomar.com.tr

All rights of specification and design change on the equipments produced due to the technological innovations and changes are reserved.